



EnGenius Cloud Managed Security Access Point

Optimal Performance, Enterprise Security & Cloud Management

Product Highlights

EnGenius ECW230S Cloud Managed Wi-Fi 6 4x4 security access point features a 24/7 intelligent wireless security system while providing maximum Wi-Fi performance. The security AP also provides zero-wait DFS to avoid connection disruption, built-in RF spectrum analysis to identify the most efficient channels, and sensors to detect nearby Bluetooth devices.

Features & Benefits

- Wi-Fi 6 technology for high-performance Wi-Fi in high-density, multi-device environments
- 4x4 antennas to support up to 2,400 Mbps in 5 GHz & 1,148 Mbps in 2.4 GHz
- 2.5 GbE throughput and 802.3at support for flexible installation over 100 meters (328 feet)
- Wireless intrusion detection system (WIDS) for threat detection
- Wireless intrusion protection system (WIPS) for attack remediation
- Zero-wait DFS to avoid client disruption when radar is detected on DFS channels
- Dedicated scanning radios for 24/7 wireless security monitoring
- RF spectrum analysis for identifying clean channels and ensuring all SSIDs are legitimate
- Bluetooth 5 low energy for BLE device detection and location-based extended advertising



Scanning Radio

1 x 2.4 GHz

1 x 5 GHz

Integrated Omni-Directional Antenna

BLE: 6 dBi

Physical Interface

1 x 10/100/1000/2500 N-BASE-T, RJ-45 Ethernet Port

1 x DC Jack

1 x Reset Button

LED Indicators

1 x Power

1 x LAN

1 x 2.4 GHz

1 x 5 GHz

1x Scanning Radio

1x Bluetooth 5 Low Energy

Power Source

Power-over-Ethernet: 802.3at Input

12VDC /2A

Maximum Power Consumption

19.5W

Wireless & Radio Specifications Operating Frequency

Dual-Radio Concurrent 2.4 GHz & 5 GHz

Standards

IEEE 802.11ax on 2.4 GHz

IEEE 802.11ax on 5 GHz

(Backward compatible with 802.11b/g/n/ac)

2.4 GHz Bluetooth 5 Low Energy (BLE) Radio

Antenna

4 x 2.4 GHz: 5dBi

4 x 5 GHz: 6dBi

Operation Modes

Managed mode: AP and Mesh

Frequency Radio

2.4 GHz: 2400 MHz ~ 2482 MHz

5 GHz: 5150 MHz ~ 5250 MHz, 5250 MHz ~ 5350 MHz, 5470 MHz ~ 5725 MHz, 5725 MHz ~ 5850 MHz

Transmit Power

Up to 23 dBm on 2.4 GHz

Up to 23 dBm on 5 GHz

(Maximum power is limited by regulatory domain)

Tx Beamforming (TxBF)

Increasing signal reliability and transmitting distance.

Radio Chains/Spatial Stream

4x4:4

SU-MIMO

Four(4) spatial stream SU-MIMO for 2.4GHz and four(4) spatial stream SU-MIMO for 5GHz up to 3,548 Mbps wireless data rate to a single wireless client device under the both 2.4GHz and 5GHz radio.

MU-MIMO

Four(4) spatial streams MU-MIMO for up to 2,400 Mbps wireless data rate to transmit to two(2) streams MU-MIMO 11ax capable wireless client devices under 5GHz simultaneously.

Four(4) MU-MIMO for up to 1,148 Mbps wireless data rate to transmit to two (2) streams MUMIMO 11ax capable wireless client devices under 2.4GHz simultaneously.

Supported Data Rates (Mbps):

802.11ax:

2.4 GHz: 9 to 1,148 (MCS0 to MCS11, NSS = 1 to 4)

5 GHz: 18 to 2,400 (MCS0 to MSC11, NSS = 1 to 4)

802.11b: 1, 2, 5.5, 11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

802.11n: 6.5 to 600 (MCS0 to MCS31)

802.11ac: 6.5 to 1,733 (MCS0 to MCS9, NSS = 1 to 4)

Supported Radio Technologies

802.11ax: Orthogonal Frequency Division Multiple Access(OFDMA)

802.11ac/a/g/n: Orthogonal Frequency Division Multiple (OFDM)

802.11b: Direct-sequence spread-spectrum (DSSS)

Channelization

802.11ax supports very high throughput (VHT) –VHT 20/40/80 MHz

802.11ac supports very high throughput (VHT) –VHT 20/40/80 MHz

802.11n supports high throughput (HT) –HT 20/40 MHz

802.11n supports very high throughput under the 2.4GHz radio –VHT40 MHz (256-QAM)

802.11n/ac/ax packet aggregation: A-MPDU, A-SPDU

Dynamic Frequency Selection (DFS) Certified

Supported Modulation

802.11ax: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM

802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM

802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM

802.11b: BPSK, QPSK, CCK

Management Multiple BSSID

8 SSIDs on both 2.4GHz and 5GHz bands

VLAN Tagging

Supports 802.1q SSID-to-VLAN Tagging

Cross-Band VLAN Pass-Through

Management VLAN

Spanning Tree

Supports 802.1d Spanning Tree Protocol

QoS (Quality of Service)

Compliant With IEEE 802.11e Standard

WMM

SNMP

v1, v2c, v3

MIB

I/II, Private MIB

Wireless Security

WPA3 Enterprise

WPA3-PSK (SAE)

WPA3/WPA2-PSK Mixed

WPA2 Enterprise (AES)

WPA2 AES-PSK

Hide SSID in Beacons

MAC Address Filtering, Up to 32 MACs per SSID

Wireless STA (Client) Connected List

SSH Tunnel

Client Isolation

Wireless Monitoring

WIPS/WIDS Dedicated Dual-Band Radios

Rogue AP & Device Detection

RF Spectrum Analysis

Zero-Wait DFS

Environment & Physical

Temperature Range

Operating: 32°F~104°F (0 °C~40 °C)

Storage: -40 °F~176 °F (-40 °C~80 °C)

Humidity (non-condensing)

Operating: 90% or less

Storage: 90% or less

Dimensions & Weight

Weight: 1.34 lbs. (607 g)

Length: 8.27" (210 mm)

Width: 8.27" (210 mm)

Height: 1.31" (33.2 mm)

Packaging

Weight: 2.5 lbs. (1134 g)

Length: 9.65" (245 mm)

Width: 9.65" (245 mm)

Height: 3.35" (85 mm)

Package Contents

1 – ECW230S Cloud Managed Indoor Access Point

1 – Ceiling Mount Base (9/16" Trail)

1 – Ceiling Mount Base (15/16" Trail)

1 – Ceiling Mount Base (15/16" Trail)

1 – Ceiling and Wall Mount Screw Kit

1 – Quick Installation Guide





Warranty

2 Year


Certifications

CE

FCC

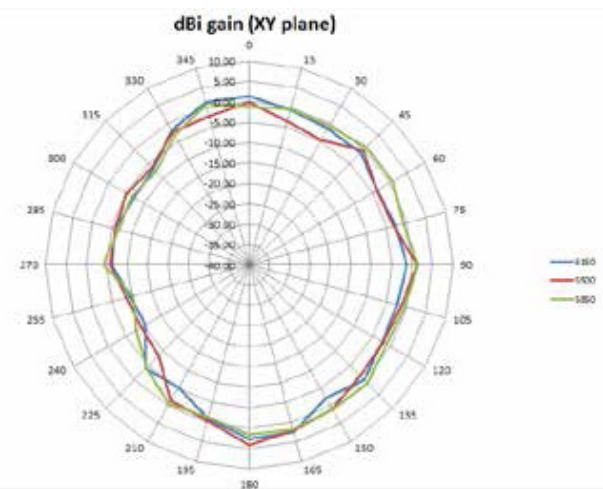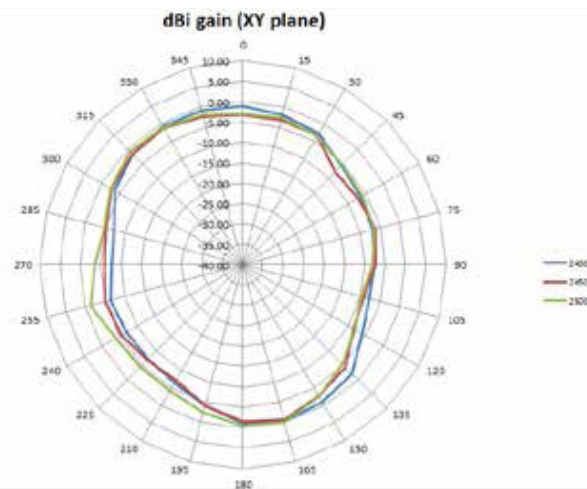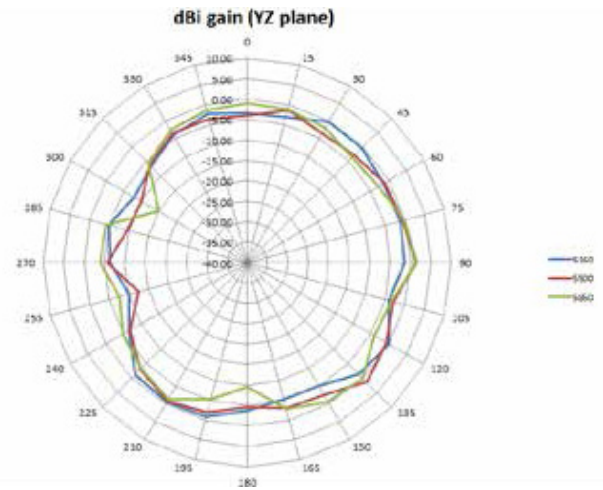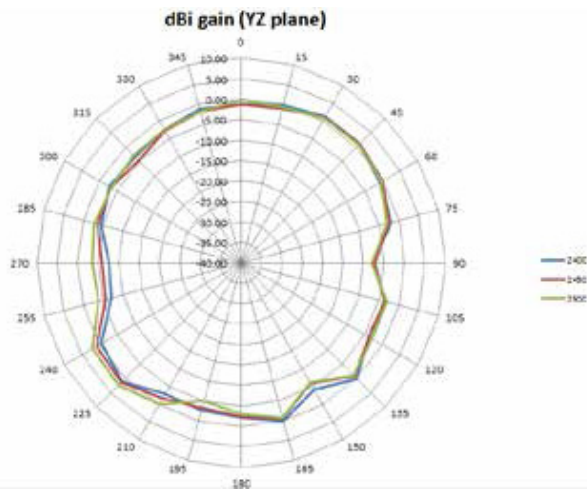

EWS230S Security Access Point

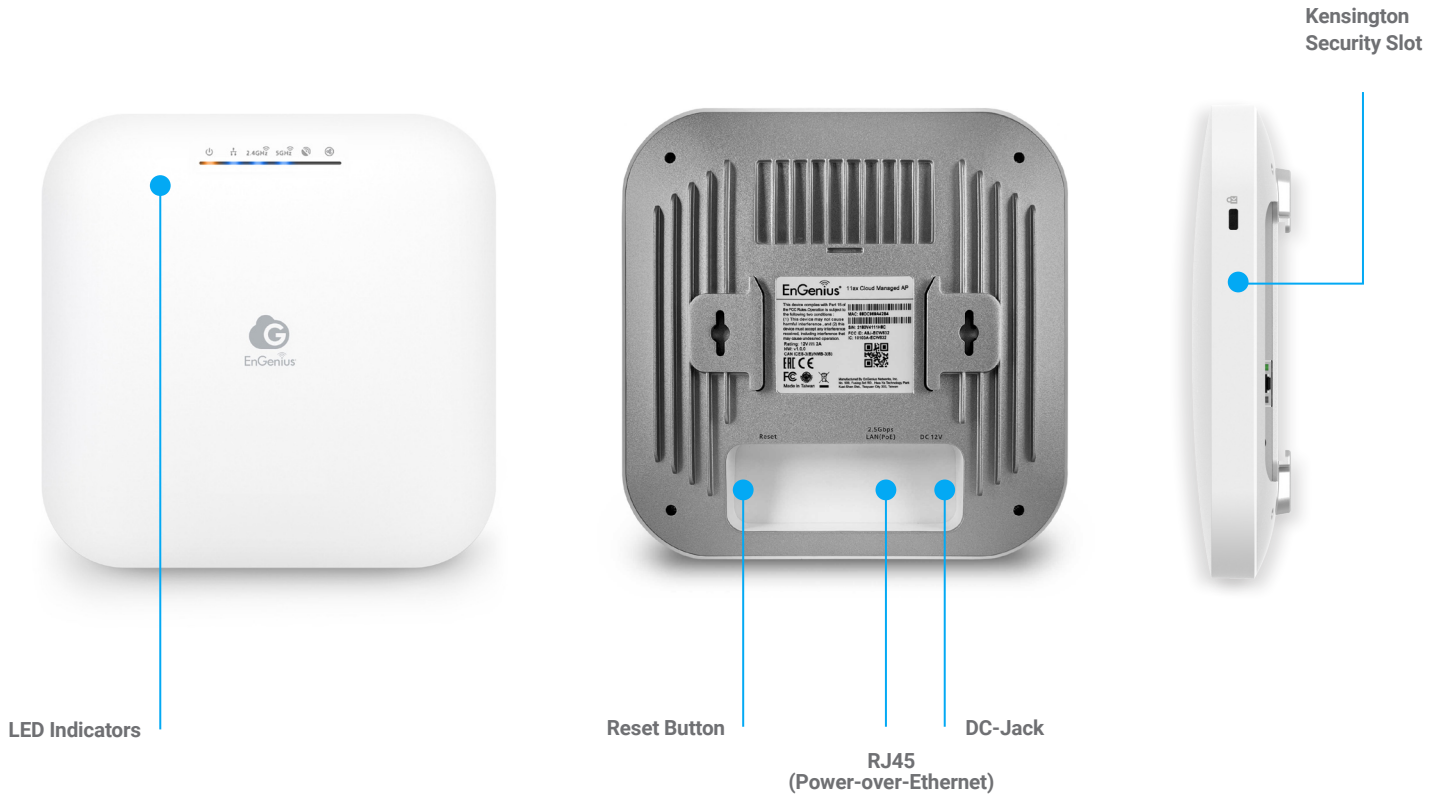

Plug & Play with Zero Configuration

Scan & Go



EnGenius Technologies | 1580 Scenic Ave. Costa Mesa, CA 92626

Email: partners@engeniustech.com | Website: engeniustech.com

Version: 1.00 11/2021

Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. For United States of America: Copyright ©2021 EnGenius Technologies, Inc. All rights reserved. Maximum data rates are based on IEEE 802.11 standards. Actual throughput and range may vary depending on distance between devices or traffic and bandwidth load in the network.