


N PLUG TERMINATION OF 5W



Interface		IEC 60169-16
Material and Plating		
Part	Material	Plating
Body	Brass	Ni
Insulator	PTFE	-
Center conductor	Beryllium copper	Au
Coupling nut	Brass	Ni
Resistance	AL2O3	
Mechanical properties		
Durability	Mating cycles ≥500	
Environmental		
Temperature Range	-40°C ~ +85°C	

Electrical properties	
Characteristic Impedance	50 ohm
Frequency Range	DC-3GHz
VSWR	≤1.1
Working Voltage	335V, 50Hz, at sea level
Dielectric Withstanding Voltage	≥1000V RMS, 50Hz, at sea level
Dielectric Resistance	≥5000MΩ
Power Capability	5W
Connectors port	N-Male

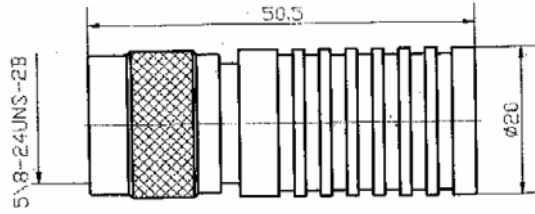