

# **QuMax for Teltonika RUTC50**

INTEGRATED MULTI-BAND LTE & 5G PANEL ANTENNA + WI-FI OMNI ANTENNA + GPS + PLACE TO INSTALL TELTONIKA RUTC50 (ALL-IN-ONE)

QuMax for RUTC50 is a high performance directional antenna designed for use in a variety of wireless communication applications. This all-in-one product consists of multi-band 5G, Wi-Fi and GPS antennas integrated in IP67 enclosure. It offers 7.5 dBi gain and wide beamwidth, which makes it suitable for use in both urban and rural environments.

Combining QuMax with RUTC50 inside the antenna housing gives you complete outdoor solution with mulitple use scenarios such as transportation public, energy, mining IoT and more.























## **6 5G / LTE ANTENNA SPECIFICATION**

**FREQUENCY** 

0.617 - 0.96 GHz

1.7 - 2.7 GHz

3.3 - 4.6 GHz

4.7 - 6.0 GHz

GAIN

0.617 - 0.96 GHz: 6 dBi

1.7 - 2.7 GHz: 7 dBi

3.3 - 4.6 GHz: 7 dBi

4.7 - 6.0 GHz: 5.5 dBi

**SUPPORTED LTE BANDS** 

1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 46, 47, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106

n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n46, n47, n48, n53, n65, n66, n67, n71, n77, n78, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256

**VSWR** 

**SUPPORTED 5G BANDS** 

<2.00, max <3.00

**BEAMWIDTH** 

80°/80° ±15°

**POLARIZATION** 

X (+-45degrees)

**IMPEDANCE** 

50 Ω



## **WI-FI ANTENNA SPECIFICATION**

**FREQUENCY** 

2.40 - 2.50 GHz 5.0 - 7.125 GHz

GAIN

2.40 - 2.50 GHz : 6 dBi 5.0 - 7.125 GHz : 7.5 dBi

**VSWR** 

<1.70, max <2.00

**BEAMWIDTH** 

360°/25° ±5°

POLARIZATION

Vertical

**IMPEDANCE** 

50 Ω

## **(\* MECHANICAL SPECIFICATION**

**MATERIALS** 

ABS, aluminum, PTFE, Fiberglass

**CONNECTOR TYPE** 

**RJ45** 

**INGRESS PROTECTION** 

IP67

**DIMENSIONS** 

486.0 x 292.2 x 105.6 mm 19.13 x 11.50 x 4.16 inch

WEIGHT

2.8 kg 6.17 lbs

**OPERATING TEMPERATURE** 

From -40°C to 80°C From -40°F to 176°F

**MAST DIAMETER** 

25-60mm 0.98-2.36 inch




## **(\* FREQUENCY BANDS**

LTE / 4G	617 MHz	1	2	3	4	5	7	8	6000M Hz
		9	10	12	13	14	17	18	
		19	20	22	25	26	27	28	
		29	30	33	34	35	36	37	
		38	39	40	41	42	43	44	
		46	47	48	49	52	53	65	
		66	67	68	69	71	85	103	
		106							
<b>5</b> G	617 MHz	n1	n2	n3	n5	n7	n8	n12	6000 MHz
		n13	n14	n18	n20	n25	n26	n28	
		n29	n30	n34	n38	n39	n40	n41	
		n46	n47	n48	n53	n65	n66	n67	
		n71	n77	n78	n80	n81	n82	n83	
		n84	n85	n86	n89	n90	n95	n97	
		n98	n100	n101	n256				




## **(\* PLOTS**

### VSWR for 5G/LTE antenna

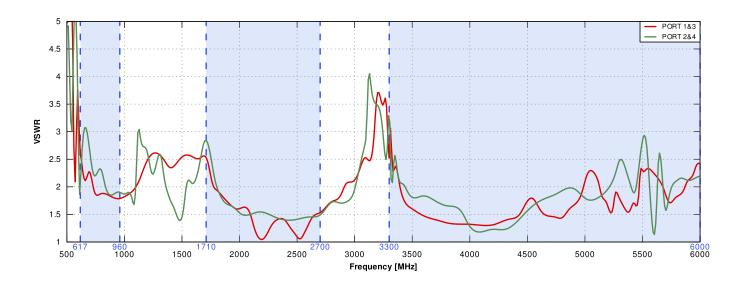


### VSWR for Wi-Fi antenna

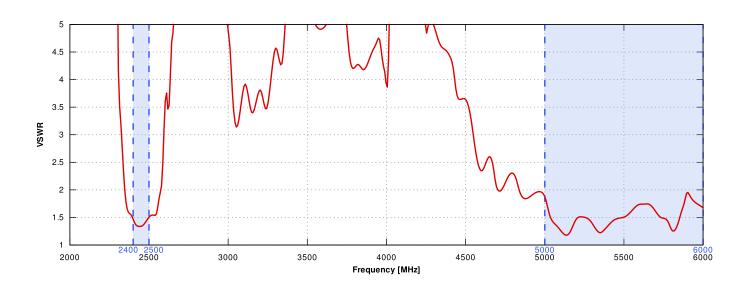




### Gain for 5G/LTE antenna

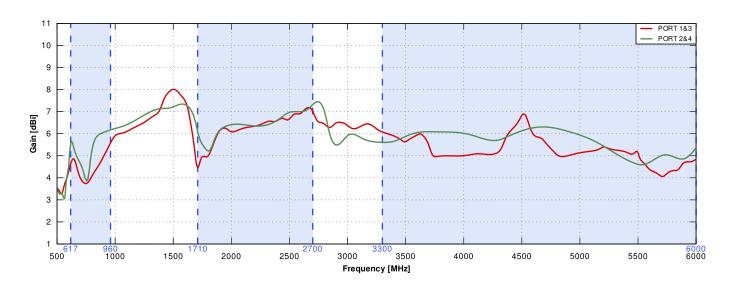


### Gain for Wi-Fi antenna

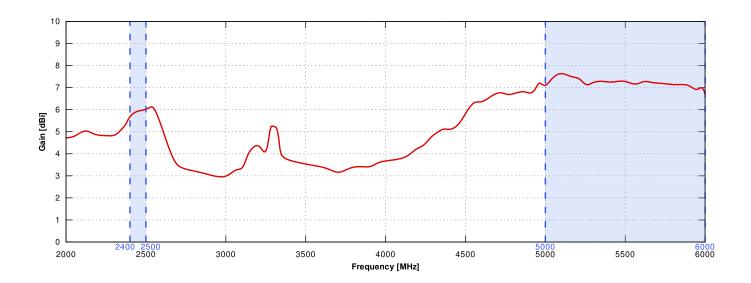




### PORT 1&3 - 5G/LTE from 650MHz to 950MHz

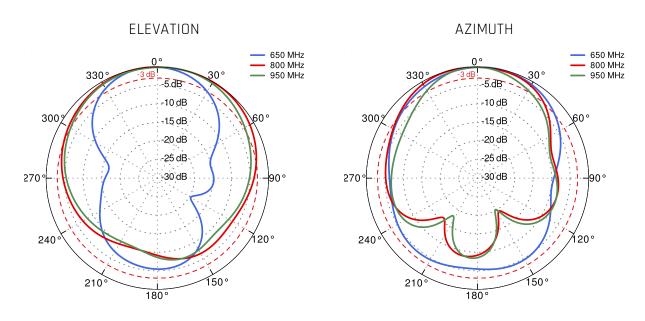


PORT 1&3 - 5G/LTE from 1,71GHz to 2,17GHz

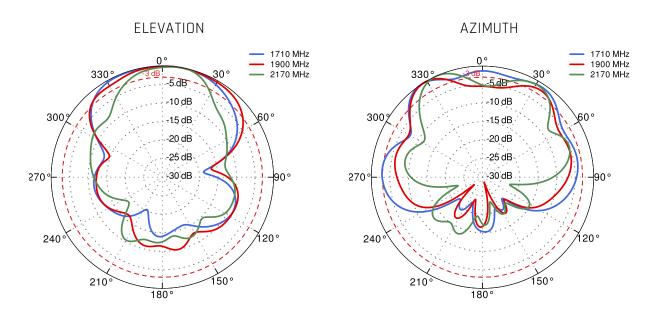




### PORT 1&3 - 5G/LTE from 2.3GHz to 2.7GHz

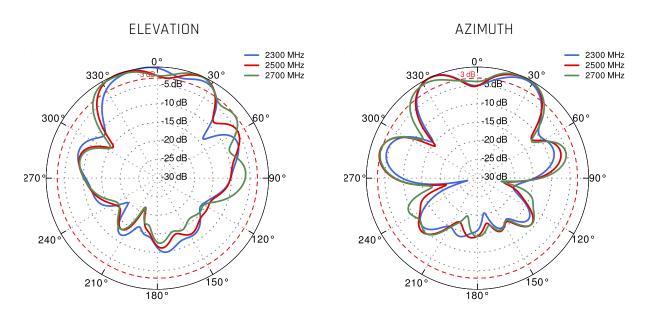


PORT 1&3 - 5G/LTE from 3.3GHz to 3.8GHz

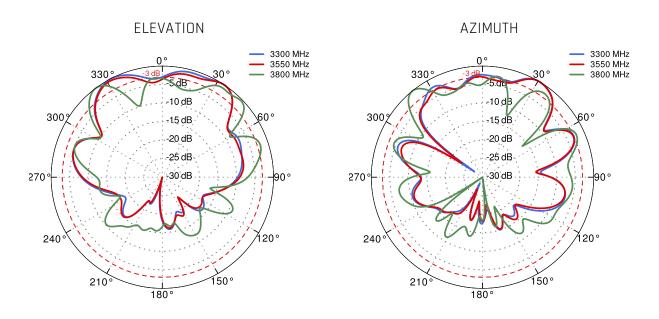




### PORT 1&3 - 5G/LTE from 4.2GHz to 4.6GHz

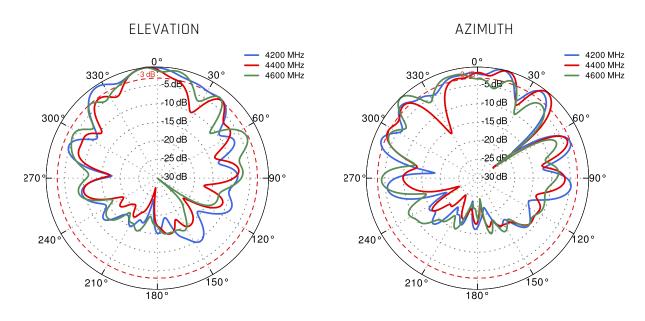


PORT 1&3 - 5G/LTE from 5.0GHz to 5.9GHz

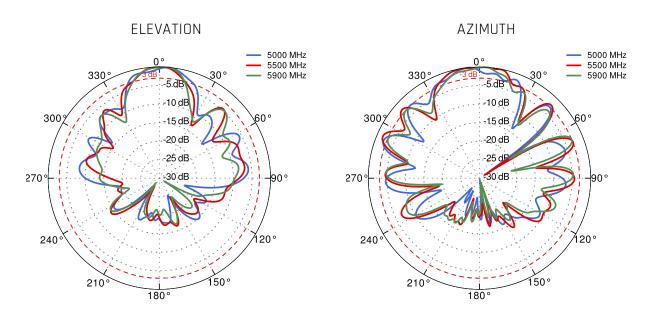




### PORT 2&4 - 5G/LTE from 650MHz to 950MHz

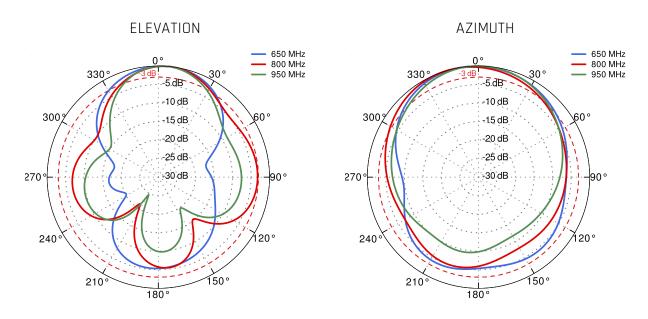


PORT 2&4 - 5G/LTE from 1.71GHz to 2.17GHz

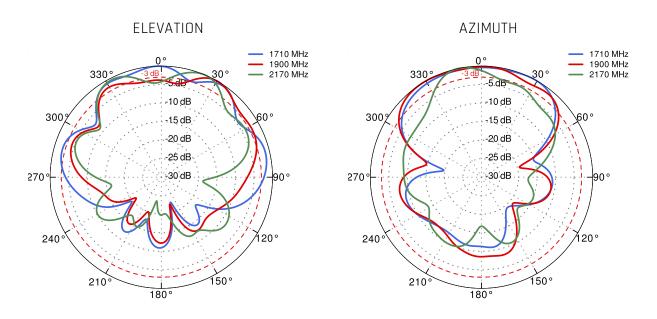




### PORT 2&4 - 5G/LTE from 2.3GHz to 2.7GHz

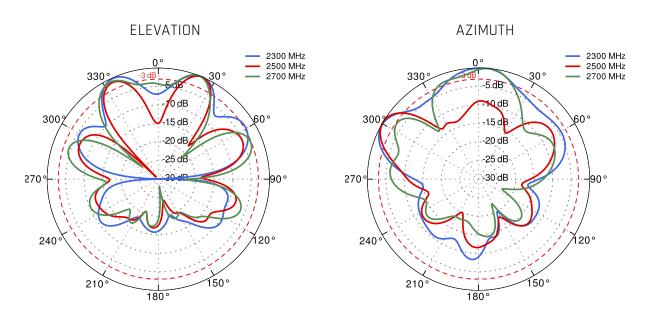


PORT 2&4 - 5G/LTE from 3.3GHz to 3.8GHz

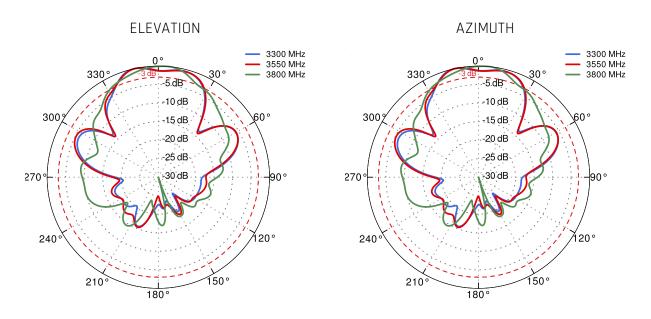




### PORT 2 - 5G/LTE from 4.2GHz to 4.6GHz

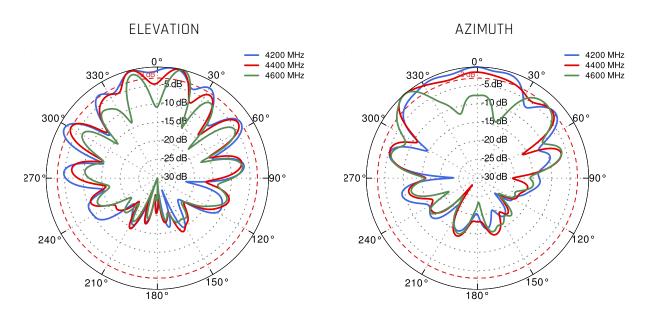


PORT 2 - 5G/LTE from 5.0GHz to 5.9GHz

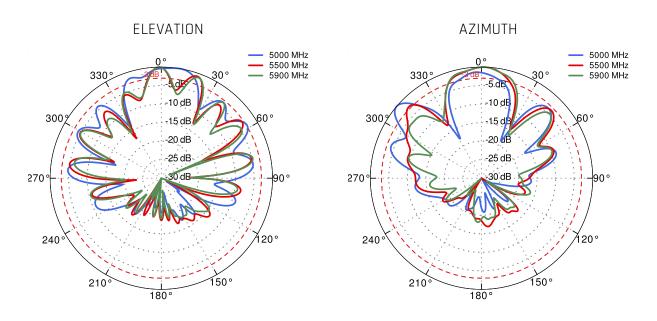





### Wi-Fi 2.4GHz and 5GHz

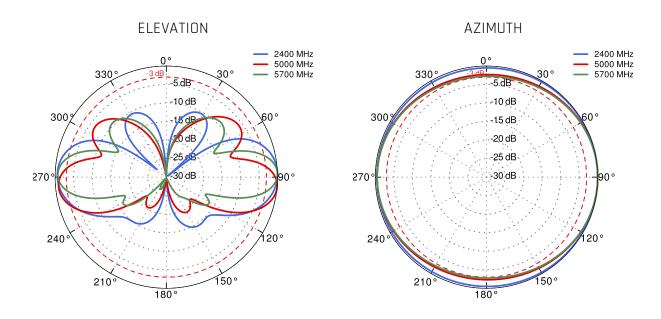


## **(\* DIMENSIONS**

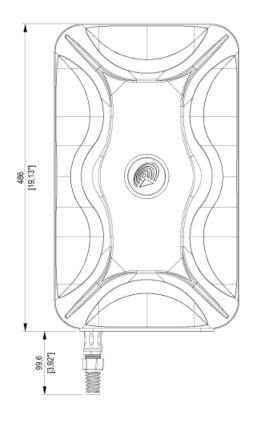

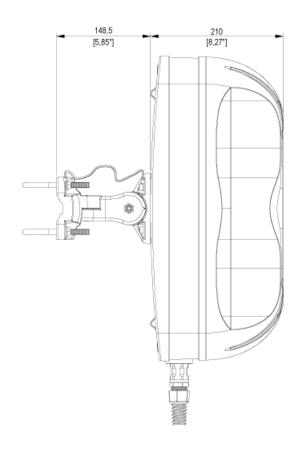



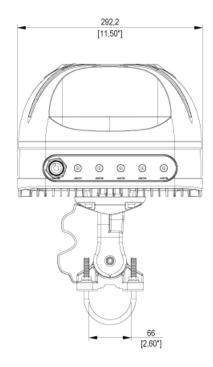



WWW.QUWIRELESS.COM

Sales email: sales@quwireless.com
Support email: support@quwireless.com

ess.com **Website:** www.quwireless.com

**Tel:** +48 513 900 416

Address: Wireless Instruments Sp. z o.o., ul. Kościuszki 27, 52-116 Iwiny, Poland



